



Beacon Flood Lights

AREAS OF APPLICATION

- Warehouses.
- Logistics halls.
- Shopping Malls.
- Commercial buildings,
- Lobbies



Electrical Characteristics	
Wattage	30,50,100,150,200 W
LED Driver	Professional Isolated Driver With Protection
Voltage Requirement	220-240V 50/60Hz
Power factor	>0.95
Surge Protection	4KV (Built-In), 10KV Optional
Light Technical Characteristics	
Light Source	Bridglux ,Cree
LED Efficiency	>130-140 lm/w
Lumens Efficacy	>110-120lm/w
Color rendering index	Minimum 70

Color Temperature	3000k & 6000K
Lifetime	50,000 hours (70% lumen maintenace @ Ta =35 C
Environmental Characteristics	
Installation	Wall Mounted
Wind force	Up to 60rn/s
Relative humidity	Up to 95%RH
Mechanical	
Housing material	High pressure Die-cast Aluminum
Gasket material	Heat resistant silicone rubber
Certification	CE,ROHS,FCC
Classification	IP66; IK08; Class I
Body Color	Gray ,White
Warranty	3(2+1)Years
Back Up Support	Local Back Up Support Products and Parts Always in Stock .


Muhammad Asif Hayat.

GM Sales & Marketing

Beacon Lighting Solutions

Cell# 0345-2221110

Dimensions & weight

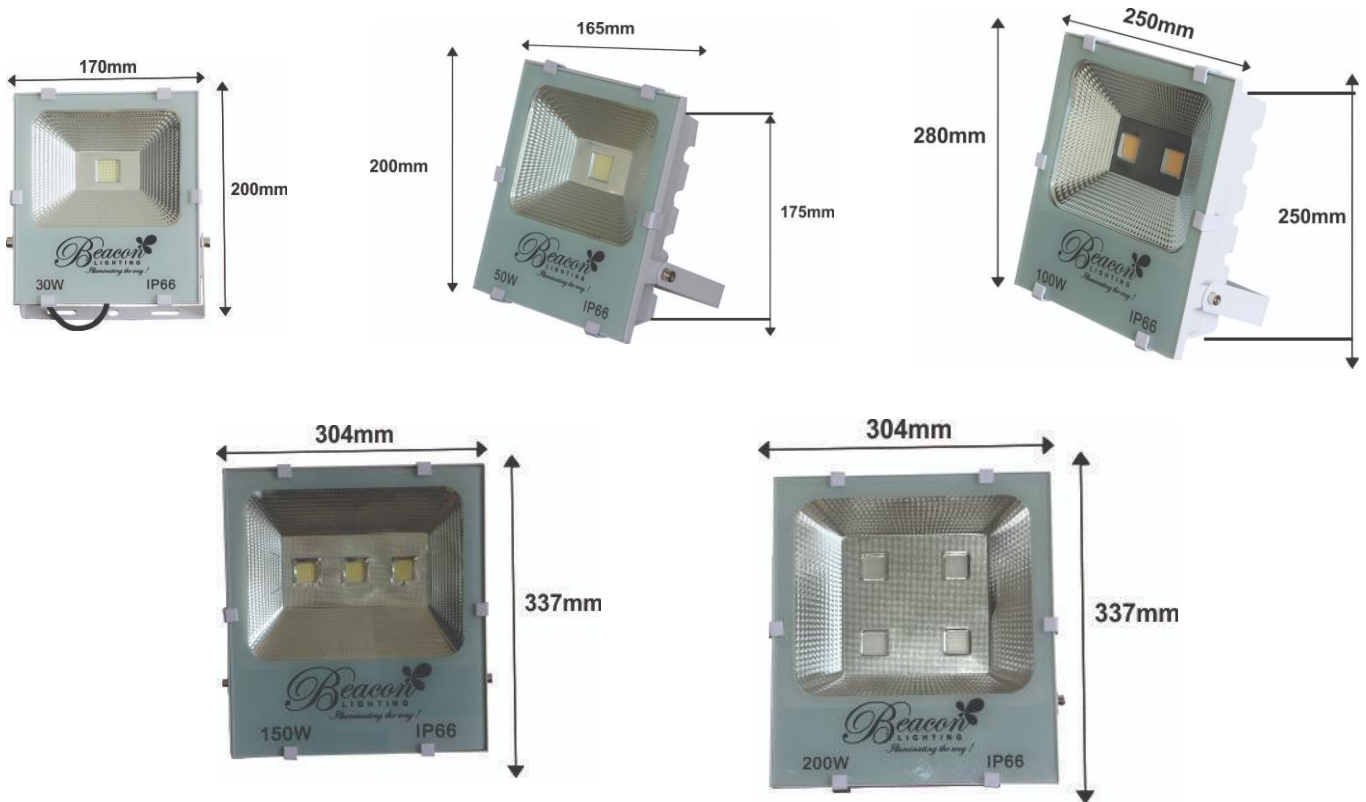

Contact No:0345-2221110
Email:Asif.hayat39@gmail.com

H-Office :- 2-A OFF Canal View Thokar Lahore
Website:Beaconlightsgroup.com