



Beacon Down Light

AREAS OF APPLICATION -



- Widely use in Hostels,Hospital
- Home Lighting ,Entertainment Venues, Malls,Office ,Stairs, Passageways etc.



Data Sheet

Electrical Characteristics	
Model	BLS-11
Voltage Requirement	220-240V 50/60Hz
Power factor	>0.95
Light Technical Characteristics	
Light Source	Bridglux
LED Efficiency	120 to 130lm/w
LED Efficacy	>110 lm/w
Color rendering index	Minimum 80
Color Temperature	3000k/4000k/6000k
Lifetime	50,000 hours (70% lumen maintenace @ Ta =35 °C)
Environmental Characteristics	

Working temperature	-40' C < Ta °= 55°C
Nominal beam angle [°]	20°-80°
Inner pack type	Box
Mechanical	
Housing Material	Aluminum Alloy+PC
Lens	PMM
Certifications	CE,ROHS,FCC
Classification	IP 20
Body Color	White
Warranty	2 years Replacement warranty
Back Up Support	Local Back Up Support Products and Parts Always in Stock .

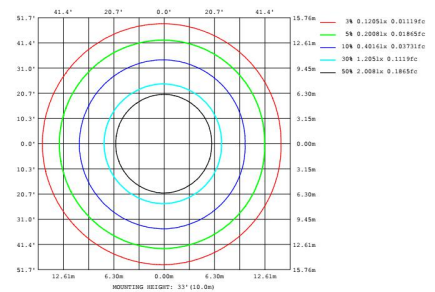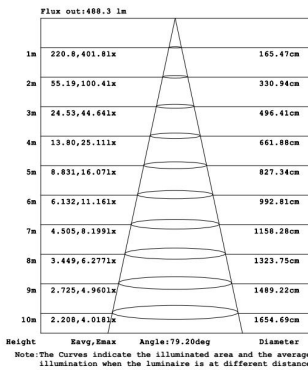

H-Office :- 2-A OFF Canal View Thokar Lahore
Email:beaconlightsgroup@gmail.com

Contact No:0321-8200872
Website:Beaconlightsgroup.com